


SECTIONAL ELEVATION

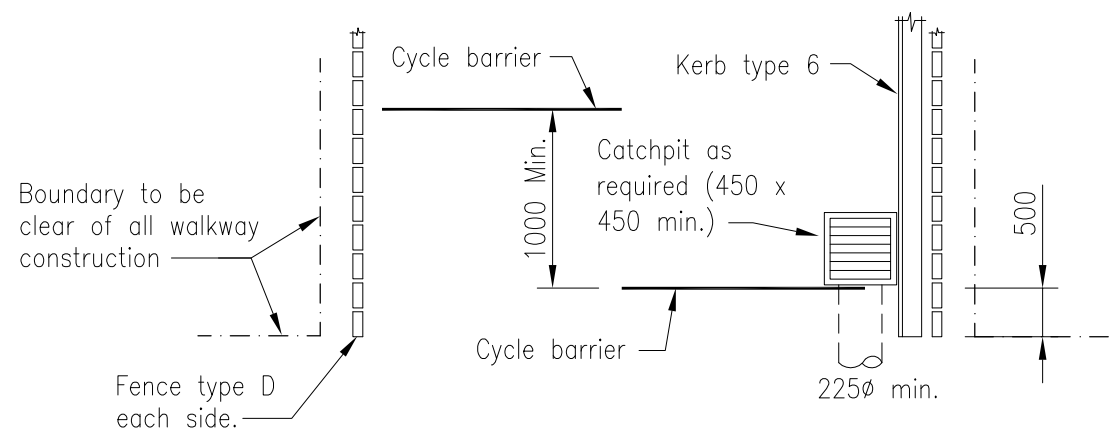

PLAN LAYOUT

NOTES

1. Minimum longitudinal grade of accessway to be 0.5%. Maximum grade to be 12.5%.
2. Runoff to discharge to catchpit or alternative discharge point if specified.
3. Cycle barriers only required where pedestrian safety is an issue.


PREPARED BY:




**AUCKLAND CITY**  
Transport

---

PEDESTRIAN  
ACCESSWAY – TYPE B

SCALE :	NTS.
DRAWN :	APC
ISSUE DATE :	11/2008
APPROVED :	
PLAN No.	ISSUE A
2008/0611	