


PLAN

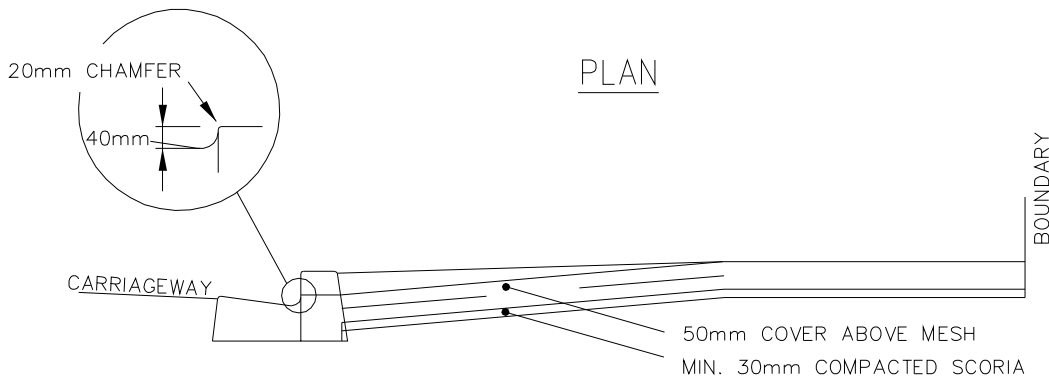

SECTION

NOTES: -

1. Work must be inspected by the Council representative before any concrete is poured.
2. Concrete shall be plain light broom finish. 20MPa at 28 days for the entire distance from the kerb line or edge of carriageway to the boundary line. The use of exposed aggregate or special finishes is not permitted.
3. Excavation shall be fenced and lit at night.
4. Existing concrete to be cut out neatly and removed.
5. Brick or precast concrete paving units may be used only between the property boundary and the rear of the footpath to comply with NZS 3116:1981 Interlocking Concrete Paving.
6. Business crossing plan dimensions to be specifically designed, to accommodate all vehicle types that may be required to access the site.
7. Residential crossings to be min. 150mm thick. May be reduced to 110mm thick if one layer of 665 mesh used.
8. Business crossings shall be 200mm thick without mesh.
9. Refer also to sheet 3.8 - TYPICAL VEHICLE CROSSING SLOPE DETAILS.
10. Crossings shall not be sited over or through traffic control devices or formed parking bays.



Head Office: 50 Centreway Road, Orewa  
Private Bag 500, Orewa, 1461, New Zealand  
Tel: 0800 4265169, Fax (09) 4267280  
Email: info@rodney.govt.nz

STANDARD DETAIL:

**VEHICLE CROSSING  
(FOOTPATH ADJACENT  
TO KERB)**

Copyright on this Drawing is Reserved  
DATE: JANUARY 2009  
NOT TO SCALE

RDC NO: SHEET NO: REV:

**18000 3.4 1**