

DRAWING SET INDEX

PLAN No.	TITLE	VERSION
SL001	STREET LIGHTING – DEMARCATION POINT	1.0
SL002	TYPICAL SHEAR BASE DETAIL (EXPLODED VIEW) SPEED LIMIT GREATER THAN 70km/hr	1.0
SL003	STREET LIGHTING – EARTHING DETAIL	1.0
SL004	STREET LIGHTING – ELECTRICAL CONNECTIONS	1.0
SL005	TRAFFIC SIGNAL/STREET LIGHT COMBINATION ELECTRICAL SCHEMATIC	1.0
SL006	STREET LIGHTING PEDESTRIAN CROSSING POLE	1.0



REVISION	BY	DATE



AUCKLAND TRANSPORT
CODE OF PRACTICE

TITLE
**STREET LIGHTING
DRAWING INDEX**

SCALE: N.T.S.
DRAWING No. SL000
VERSION

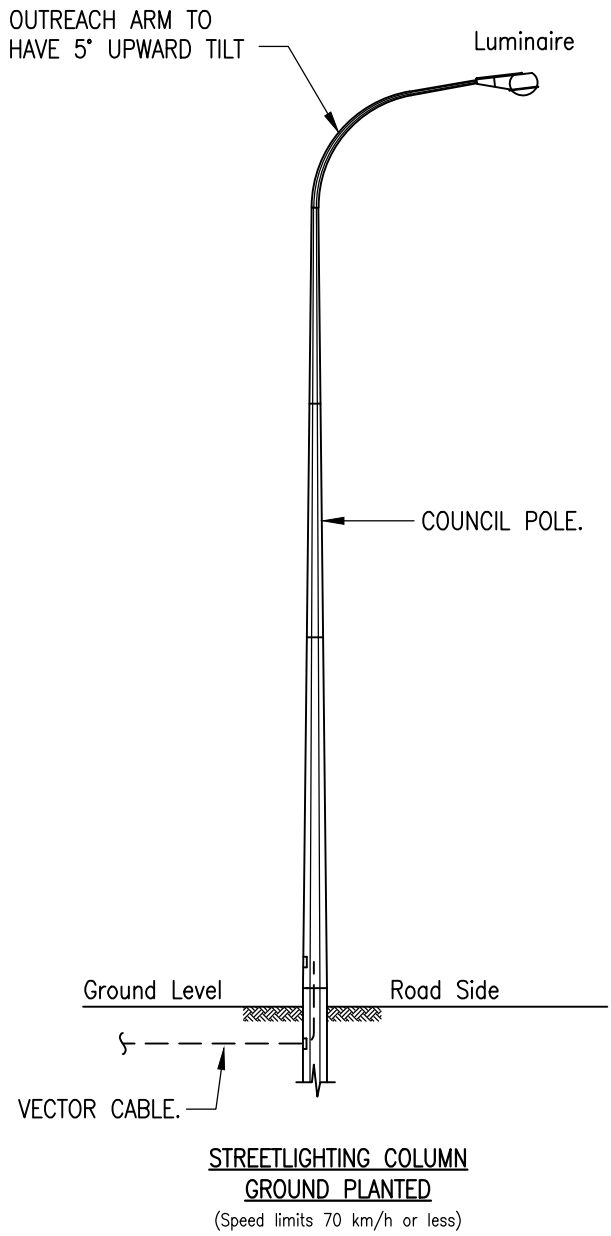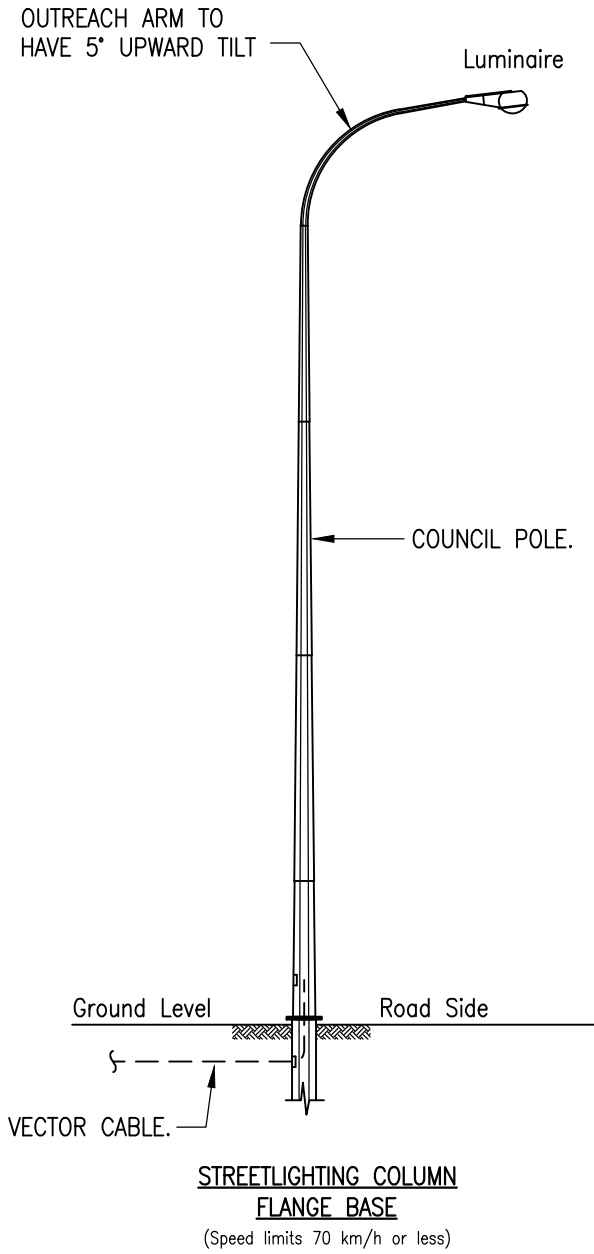


REVISION	BY	DATE



AUCKLAND TRANSPORT CODE OF PRACTICE	
TITLE	STREET LIGHTING DEMARCATIION POINT

SCALE:	N.T.S.
DRAWING No.	SL001
VERSION	

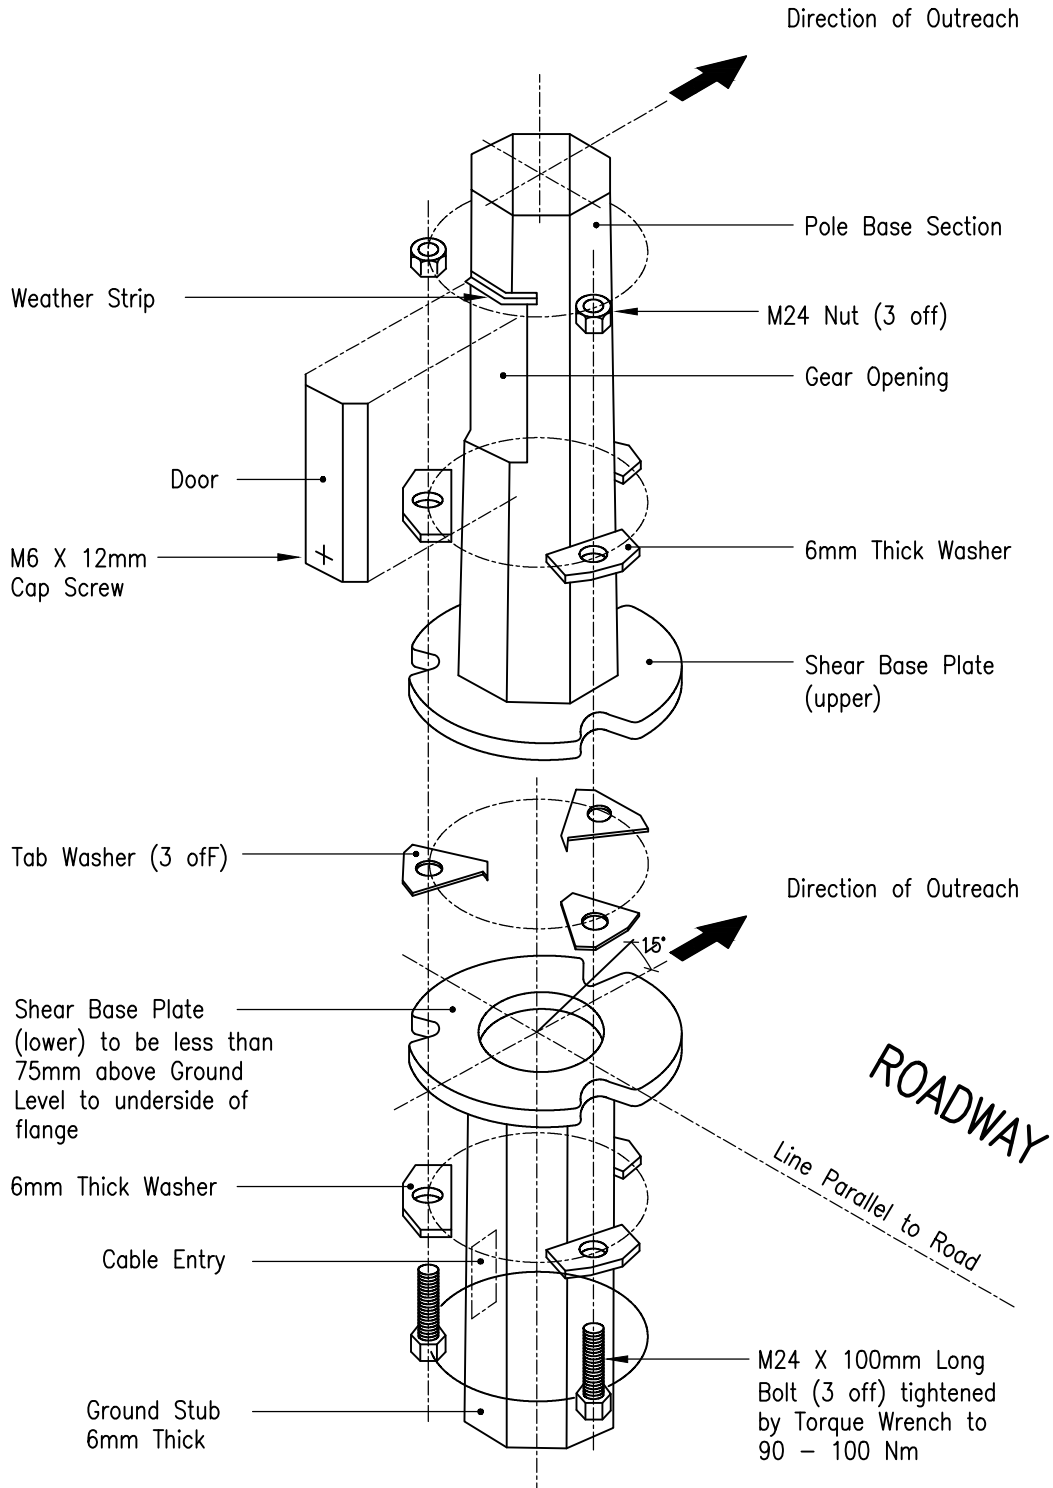


REVISION	BY	DATE



AUCKLAND TRANSPORT
CODE OF PRACTICE

TITLE **TYPICAL SHEAR BASE DETAIL
(EXPLODED VIEW)
SPEED LIMIT GREATER THAN 70km**

SCALE:	N.T.S.
DRAWING No.	SL002
VERSION	

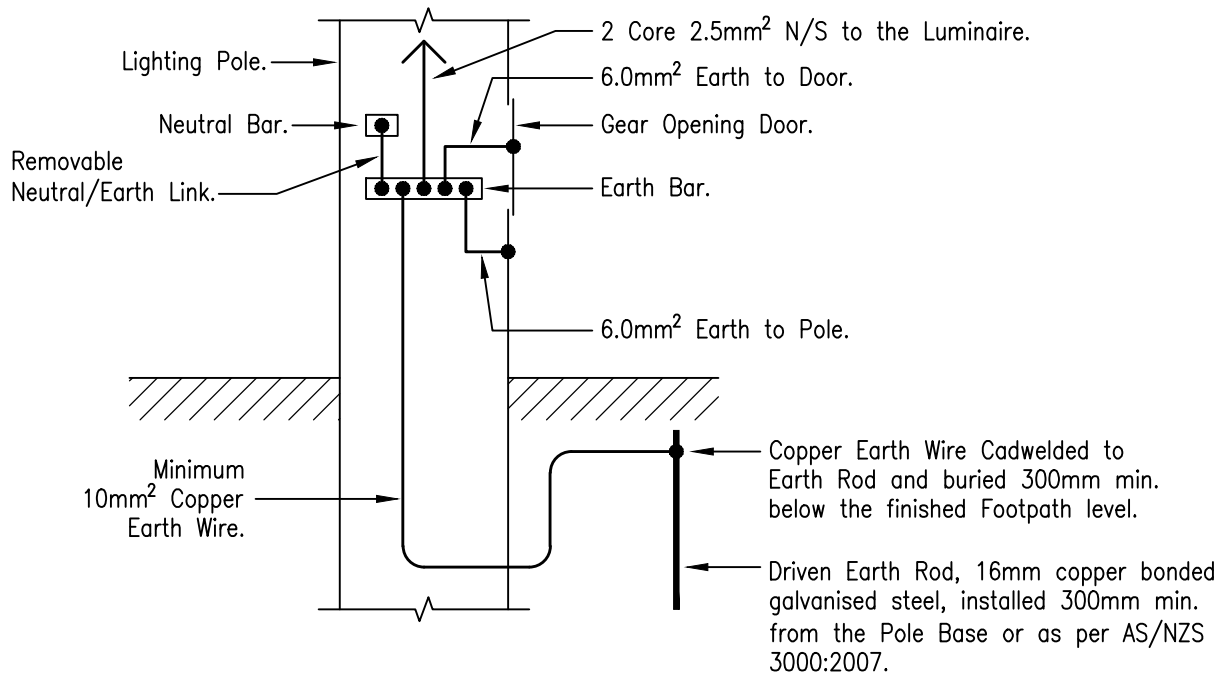


TYPICAL POLE EARTHING DETAIL

REVISION	BY	DATE



AUCKLAND TRANSPORT CODE OF PRACTICE	
TITLE	STREET LIGHTING EARTHING DETAILS

SCALE:	N.T.S.
DRAWING No.	SL003
VERSION	

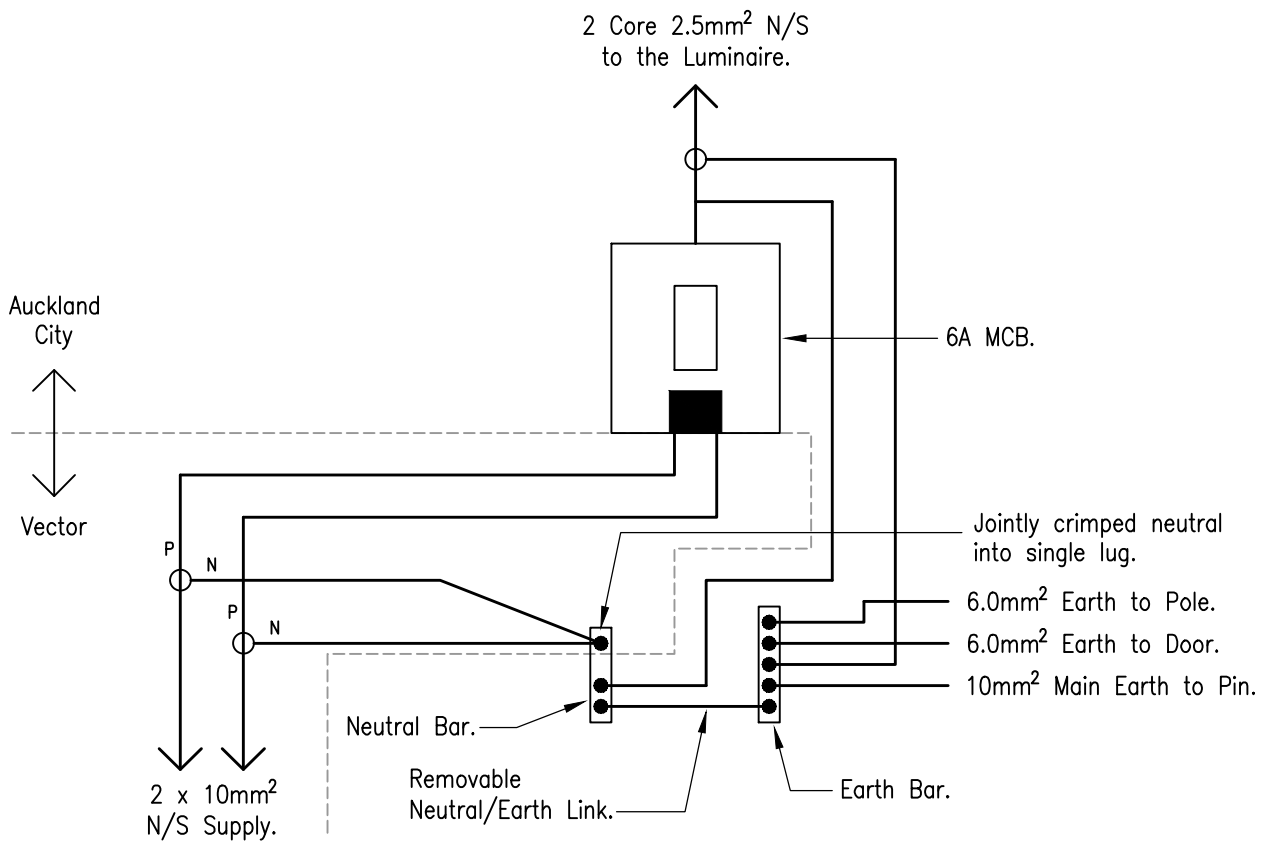

STANDARD STREETLIGHTING POLE ELECTRICAL CONNECTIONS


REVISION	BY	DATE



AUCKLAND TRANSPORT
CODE OF PRACTICE

TITLE
**STREET LIGHTING
ELECTRICAL CONNECTIONS**

SCALE:	N.T.S.
DRAWING No.	SL004
VERSION	

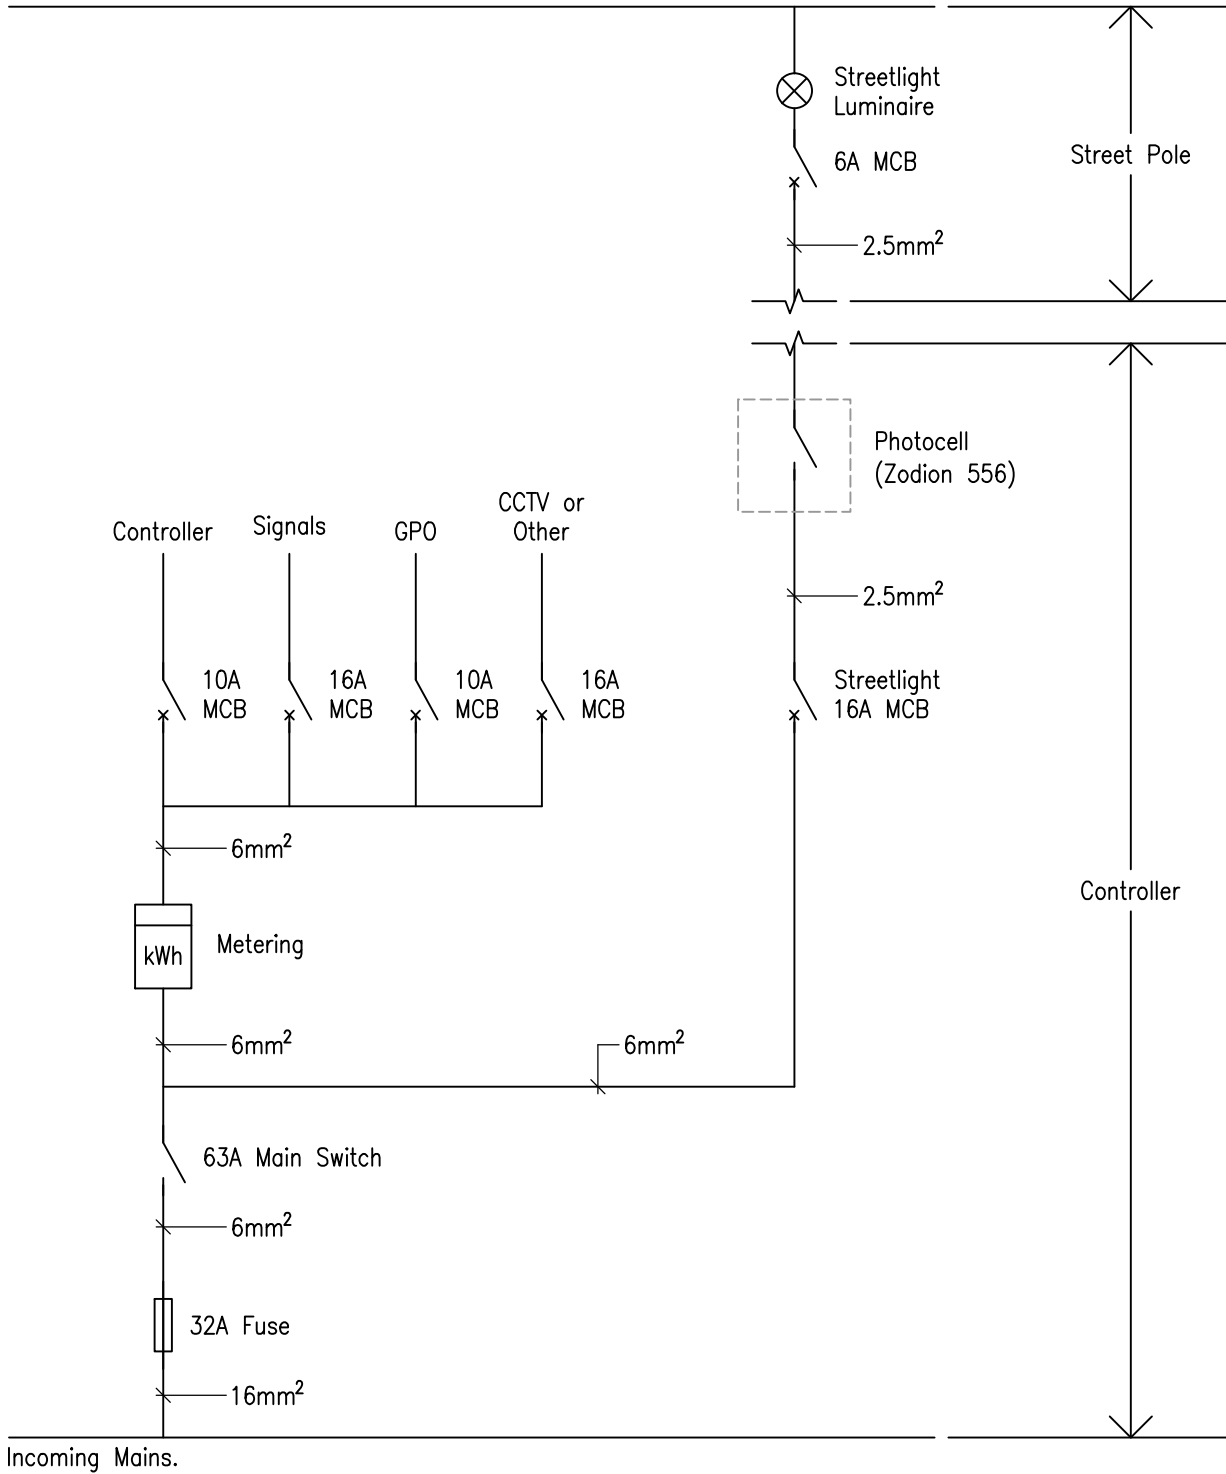


REVISION	BY	DATE



AUCKLAND TRANSPORT CODE OF PRACTICE	
TITLE	TRAFFIC SIGNAL/STREET LIGHT COMBINATION ELECTRICAL SCHEMATIC

SCALE:	N.T.S.
DRAWING No.	SL005
VERSION	

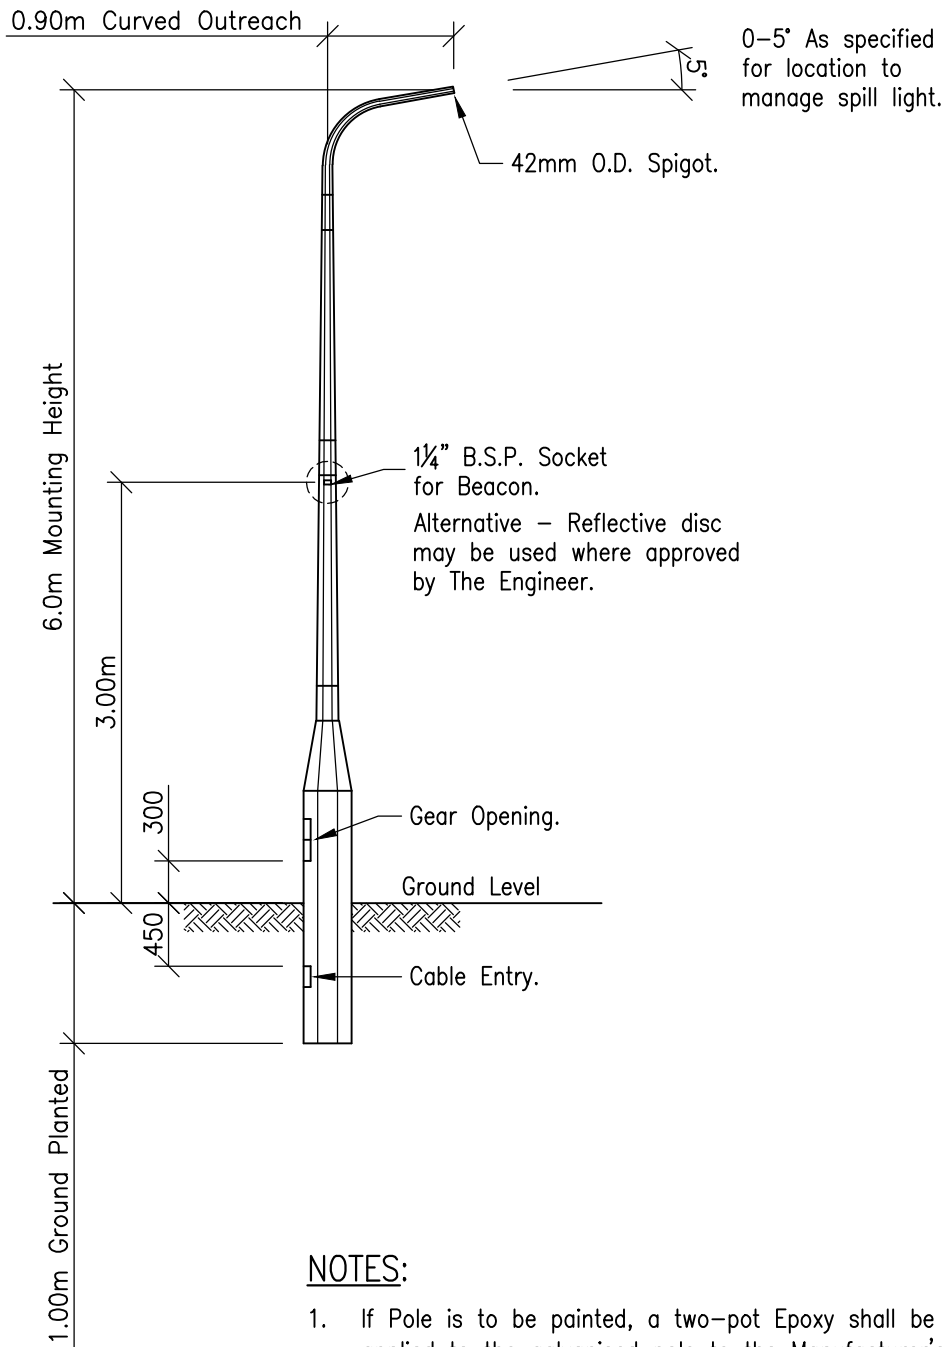

NOTES:

1. If Pole is to be painted, a two-pot Epoxy shall be applied to the galvanised pole to the Manufacturer's Specifications.
2. At zebra crossings poles should be at least 700m offset from kerb face.
3. At zebra crossings the lower 3m of the pole shall be painted with alternative parallel black and white bands 300mm wide.

REVISION	BY	DATE



AUCKLAND TRANSPORT CODE OF PRACTICE	
TITLE	STREET LIGHTING PEDESTRIAN CROSSING POLE

SCALE:	N.T.S.
DRAWING No.	SL006
VERSION	